Technical Data Sheet

Date: 03/11/2022

4x32A CEE N. Surface Mount Socket Outlet

Ref. No: 3127-307-1600



Pack Unit
5


Weight
317 gr.


Technical Informations

Ampere	32A
Voltage	380 - 415 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 67
Clock Postion	6h
Number Of Poles	4 (3P + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Screw
Operation Temp. (-25 / +40IEC60309)	-25 / +80 (1 hour -100° C)


Dimensions

a	80,5	**e**	23,5
b	83	**f**	140
c	68	**g**	108
d	25	**k**	13,5
Cable Diameter (Min.)	2,5 mm²	**Øh**	5,5
Cable Diameter (Max.)	10 mm²	**M**	M25x1,5



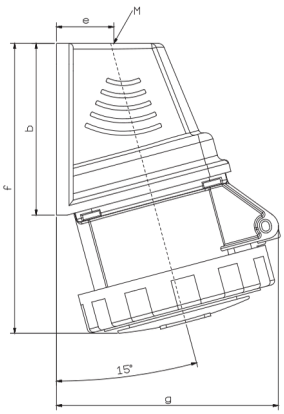

Different Earth Contact Positions (Clock Positions)

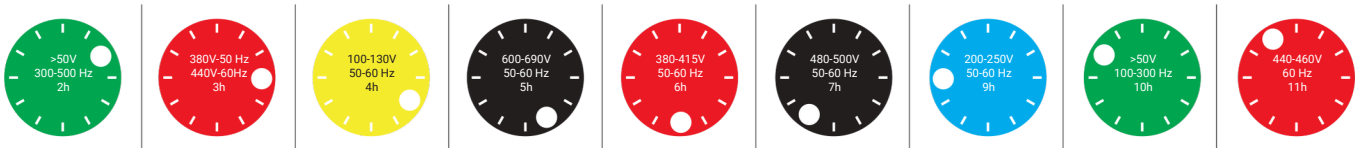

3127-307-1100-2h	3127-307-1600-3h	3127-307-0700-4h	3127-307-0300-5h	3127-307-1600	3126-307-0300-7h	3127-307-0900-9h	3127-307-1100-10h	3127-307-1600-11h

Tel: +90 232 880 90 01
Fax: +90 232 880 90 02

info@tpelectric.com.tr

Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE