

Technical Data Sheet

Date: 03/11/2022

5x32A CEE N. Panel Mount Socket Outlet

Ref. No: 3007-304-1601



Pack Unit

10



Weight

195 gr.




Technical Informations

Quick Connection

Ampere	32A
Voltage	380 - 415 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 44
Clock Postion	6h
Number Of Poles	5 (3P + N + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Quick
Operation Temp. (-25 / + 40 IEC 60309)	-25 / +80 (1 hour -100° C)

Dimensions

a	70	e	30
b	70	f	58
c	56	g	128
d	56	Øh	5,5
Cable Dia. (Flex. Min.)	2,5 mm²	Øl	60
Cable Dia. (Flex. Max.)	6 mm²	k	104
Cable Dia. (Rigid Min.)	2,5 mm²		
Cable Dia. (Rigid Max.)	10 mm²		

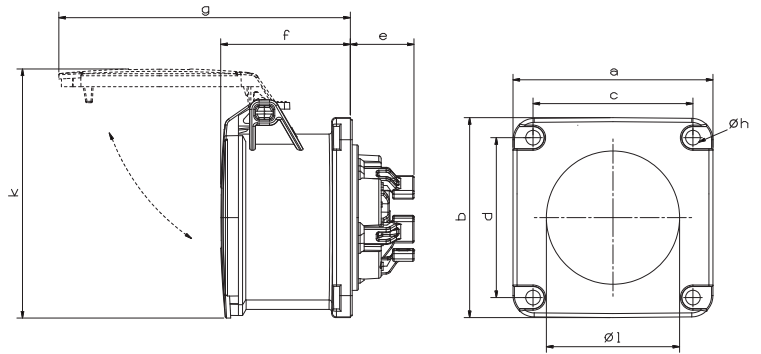

Different Earth Contact Positions (Clock Positions)

3007-321-1170-2h	3007-321-1670-3h	3007-321-0770-4h	3007-321-0370-5h	3007-321-1670	3007-321-0370-7h	3007-321-0970-9h	3007-321-1670-11h



Tel: +90 232 880 90 01
Fax: +90 232 880 90 02



info@tpelectric.com.tr



Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE