

Technical Data Sheet

Date: 03/11/2022

4x32A CEE Norm Connector

Ref. No: 3026-304-1601



Pack Unit

10



Weight

222 gr.




Technical Informations

Quick Connection

Ampere	32A
Voltage	380 - 415 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 44
Clock Position	6h
Number Of Poles	4 (3P + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Quick
Operation Temp. (-25 / + 40 IEC 60309)	-25 / +80 (1 hour -100° C)

Dimensions

a	156
b	100
c	91
Ød	11-20,5
Cable Diameter (Min.)	2,5 mm²
Cable Diameter (Max.)	6 mm²

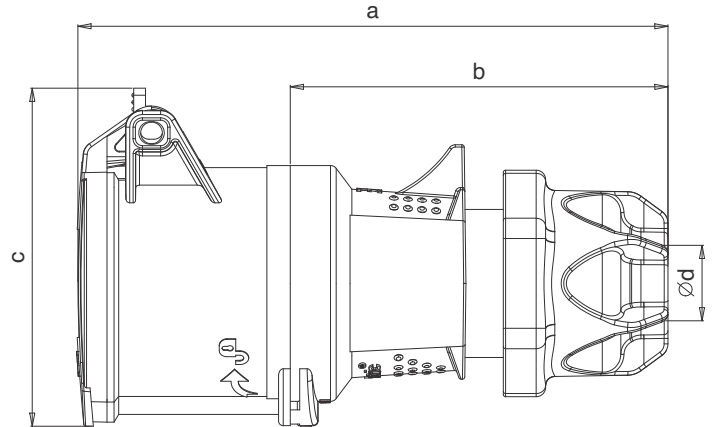

Different Earth Contact Positions (Clock Positions)

3026-304-1101-2h	3026-304-1601-3h	3026-304-0701-4h	3026-304-0301-5h	3026-304-1601	3026-304-0301-7h	3026-304-0901-9h	3026-304-1101-10h	3026-304-1601-11h



Tel: +90 232 880 90 01
Fax: +90 232 880 90 02



info@tpelectric.com.tr



Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE