

Technical Data Sheet

Date: 03/11/2022

4x32A CEE N. Angled Panel Mount Appliance Inlet

Ref. No: 3026-318-1600



Pack Unit

10



Weight

220 gr.





Technical Informations

Quick Connection

Ampere	32A
Voltage	380 - 415 V. AC
Hertz	50 - 60 Hz
Protection Class	IP 44
Clock Postion	6h
Number Of Poles	4 (3P + E)
Contact Material	Brass (CuZn)
Housing Material	PA6
Connection Type	Quick
Operation Temp. (-25 / + 40 IEC 60309)	-25 / +80 (1 hour -100° C)

Dimensions

a	85	e	126
b	85	f	96
c	70	Øh	6,3
d	70	Øl	50
Cable Diameter (Min.)	2,5 mm²		
Cable Diameter (Max.)	6 mm²		
Cable Diameter (Rigid)	2,5 mm²		
Cable Diameter (Rigid)	10 mm²		

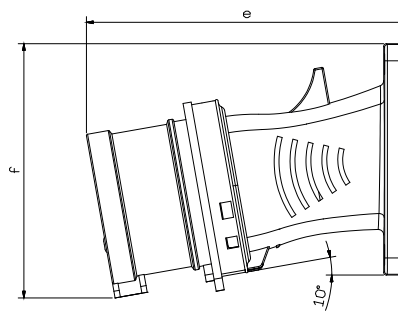

Different Earth Contact Positions (Clock Positions)

3026-318-1100-2h	3026-318-1600-3h	3026-318-0700-4h	3026-318-0300-5h	3026-318-1600	3026-318-0300-7h	3026-318-0900-9h	3026-318-1100-10h	3026-318-1600-11h



Tel: +90 232 880 90 01
Fax: +90 232 880 90 02



info@tpelectric.com.tr



Kemalpaşa O.S.B. 600 Sk. No:364
35730 Kemalpaşa - İZMİR / TÜRKİYE